


FRONT VIEW

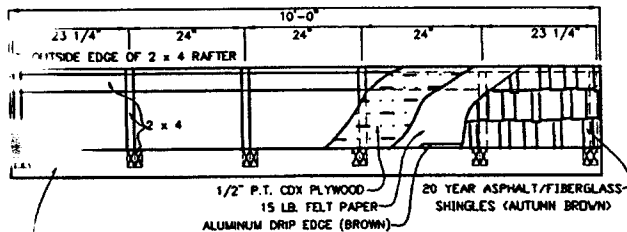


1 x 6 P.T. FASCIA BOARD (CONTINUOUS, NO JOINTS, BEVEL TOP EDGE TO MATCH ROOF PITCH). ENDNAIL WITH TWO (2)-8d NAILS TO EACH 2 x 4 RAFTER TAIL.

1 x 6 P.T. RAKE FASCIA BOARD (CONTINUOUS, NO JOINTS). NAIL WITH 8d NAILS @ 6" O.C. TO 2 x 4 RAFTERS ON GABLE ENDS.

NOTES:

1. ALL NAILS SHALL BE HOT DIPPED ZINC COATED (GALVANIZED) RING SHANK OR SPIRAL NAILS.
2. ALL LUMBER AND PLYWOOD SHALL BE PRESSURE TREATED (P.T.) WITH CHROMATED COPPER ARSENATE (CCA) AND SHALL HAVE A MINIMUM RETENTION OF 0.4 LBS. OF CCA PER CUBIC FOOT (PCF).
3. ALL LUMBER SHALL BE SOUTHERN YELLOW PINE, NO. 2 GRADE OR BETTER.
4. ALL LUMBER SHALL BE SURFACED ALL FOUR SIDES (DRESSED). ALL LUMBER DIMENSIONS SHOWN ARE NOMINAL SIZES.

PLAN VIEW

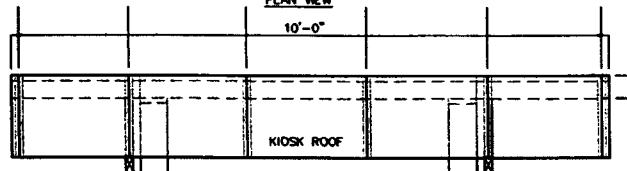

SUMMERDUCK
PARKING AREA

2 x 6 P.T. SUPPORTS

3/4" x 4'-0" x 8'-0" P.T. CDX PLYWOOD
BULLETIN BOARD, NAIL TO 6 x 6 POSTS
WITH 8d NAILS @ 6" ON CENTER.
(BY DGIF, NOT IN CONTRACT)

6 x 6 x 12"
(BY DGIF, NOT
IN CONTRACT)


1" SLOPE

EXISTING GROUND

GENERAL PURPOSE CONCRETE
260 LB./POST MIN. (BY DGIF,
NOT IN CONTRACT)

5'-2"

SIDE VIEW

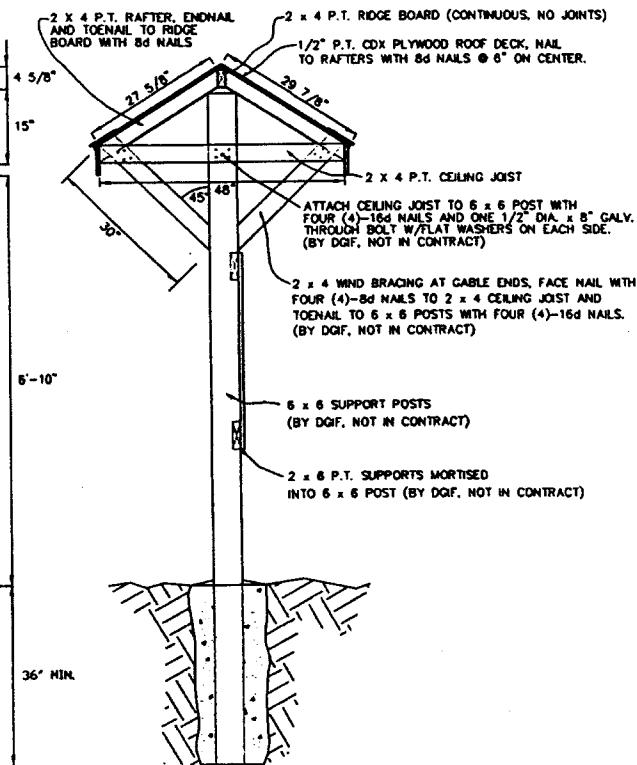

PLOT SCALE: 1:1